



SERVICES

- Limestone Pads
- Hauling with dump truck
- Any kind of skid loader work
- Compact all limestone pads



Octagon - Add 20%


Accepted Methods of Payment

Cash or Check Only



Delivery Zone Areas

- Zone 1 - up to 50 miles
- Zone 2 - up to 80 miles
- Zone 3 - up to 100 miles
- Over 100 miles - \$2.50 per mile

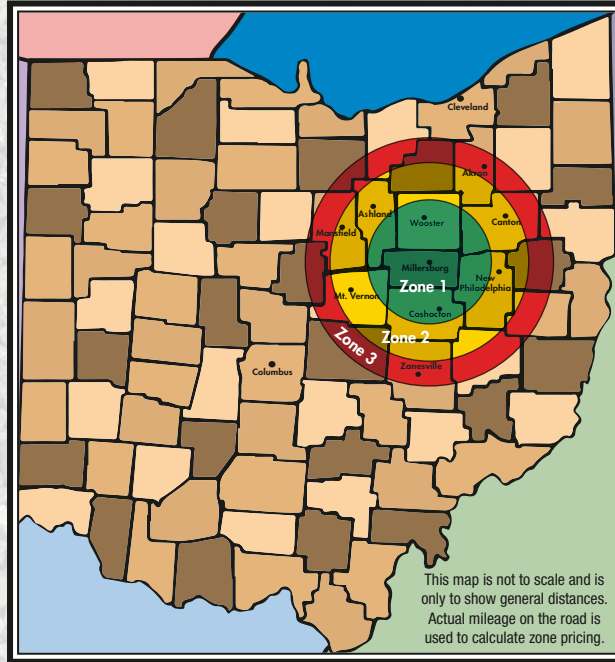

YODER SITE PREPARATION

5582 County Road 349
 Millersburg, Ohio 44654
 330-231-0047

YODER

SITE PREP

2024 PRICE LIST


Though often gone unnoticed, the shed pad is what gives your shed the proper drainage and firm foundation to stand the test of time.

Specializing in site preparation for small storage buildings.



Owner - Nelson Yoder
5582 County Road 349
Millersburg, Ohio 44654
Cell 330-231-0047

Barn Size	Base Sizes Base should be 1' bigger than barn on all sides	Limestone Base properly leveled on top of sod	Sod Dug Out 4" and put down 4" limestone to top of ground level	Sod Dug Out 4" and put down 4" limestone with one row of 4x4s around perimeter
8 x 8 Barn	10 x 10 Base	\$580	\$814	\$1,150
8 x 10 Barn	10 x 12 Base	\$600	\$835	\$1,197
8 x 12 Barn	10 x 14 Base	\$610	\$850	\$1,213
10 x 10 Barn	12 x 12 Base	\$615	\$855	\$1,218
10 x 12 Barn	12 x 14 Base	\$630	\$872	\$1,281
10 x 14 Barn	12 x 16 Base	\$645	\$893	\$1,313
10 x 16 Barn	12 x 18 Base	\$660	\$910	\$1,449
10 x 18 Barn	12 x 20 Base	\$685	\$925	\$1,491
10 x 20 Barn	12 x 22 Base	\$700	\$945	\$1,544
12 x 12 Barn	14 x 14 Base	\$710	\$950	\$1,391
12 x 14 Barn	14 x 16 Base	\$735	\$971	\$1,433
12 x 16 Barn	14 x 18 Base	\$840	\$1,081	\$1,670
12 x 18 Barn	14 x 20 Base	\$860	\$1,102	\$1,722
12 x 20 Barn	14 x 22 Base	\$875	\$1,118	\$1,764
12 x 22 Barn	14 x 24 Base	\$895	\$1,140	\$1,811
12 x 24 Barn	14 x 26 Base	\$915	\$1,155	\$1,864
14 x 16 Barn	16 x 18 Base	\$925	\$1,155	\$1,785
14 x 18 Barn	16 x 20 Base	\$955	\$1,197	\$1,864
14 x 20 Barn	16 x 22 Base	\$971	\$1,213	\$1,900
14 x 22 Barn	16 x 24 Base	\$998	\$1,229	\$1,969
14 x 24 Barn	16 x 26 Base	\$1,013	\$1,250	\$1,995
16 x 20 Barn	18 x 22 Base	\$1,066	\$1,307	\$2,179
16 x 24 Barn	18 x 26 Base	\$1,100	\$1,344	\$2,257
16 x 30 Barn	18 x 32 Base	\$1,190	\$1,433	\$2,452
16 x 32 Barn	18 x 34 Base	\$1,220	\$1,450	\$2,510

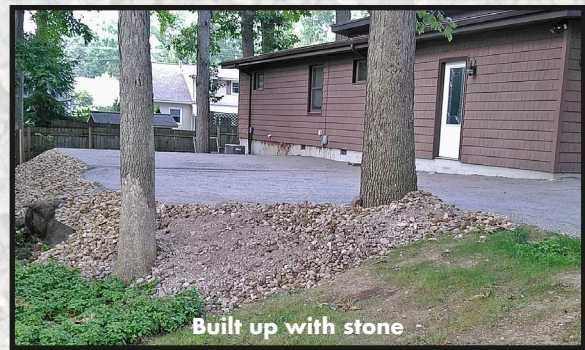

Built up with stone



Dug out on high side, filled in on low side with 1 row of 4x4s



Sod dug out 4" with limestone on top to ground level
Does not include hauling out sod.
Hauling out sod is available for an additional fee.



Limestone Only



Built up with 4x4s & filled in with #57 limestone

Delivery Zone Pricing: Zone 1 - Above Prices • Zone 2 - Add \$150 • Zone 3 - Add \$290

Prices are based on:

#57 Limestone 4" Thick
Normal ground conditions
Access to site with equipment
(dump truck and uni loader)

Additional 4x4s \$4.00 per ft.

Prices subject to change without notice.

Homeowner is responsible to locate and clearly mark all underground utilities.

Yoder Site Prep is not responsible for any yard damage.